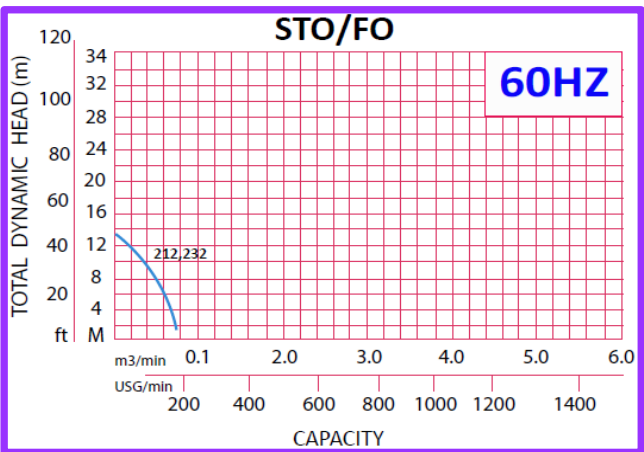
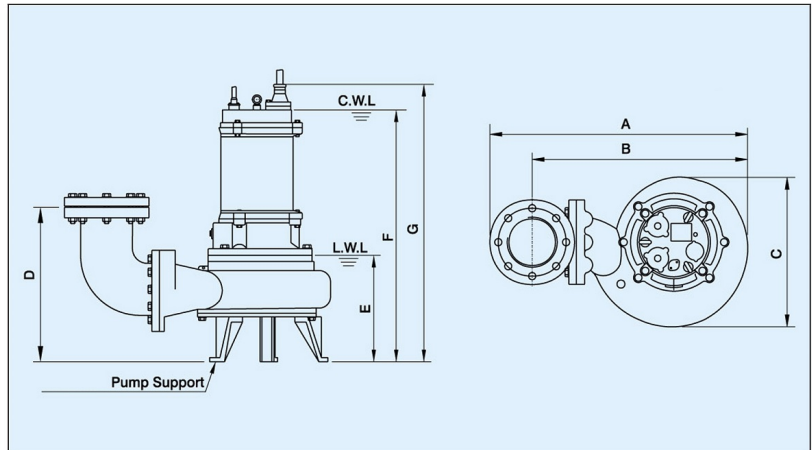


Gol Pumps Thechnology		DATA SHEET		Gol Pumps Technology INC www.golpumps.com	
		Sewage Pump			
Pump Data					
Brand : Gol Pump					
Model : GFO - 212D					
Head Rate : 23 FEET	Flow Rate: 133 GPM				
Head Max: 46 FEET	Flow Max: 192 GPM				
Head Min: 6 FEET	Flow Min : 5 GPM				
RPM : 3600					
Normal Power P1 : 2 HP					
Fluid: Water					
Fluid Temperture: at about 25 °C					
Density: water 997 kg/m³					
Fluid Viscosity: 8.90 × 10-4 Pa·s					
With Float switch NONE					
Self Priming Submersible					
Delivery size 3" NPT					
Suction size With Strainer					
Made in : TAIWAN					
Motor Data					
Power P2: *					
Power P1: 1.5 KW					
Phase (PH): 1					
Rate Voltage : 240 V					
Capacitor Need : *					
Ferequency : 60 Hz					
Rated Speed (rpm): 3600 rpm					
Current (A): 11 A					
Cos φ : 0.95					
Degree of Protection (IP): IP 68					
Safety Protection Included: E					
length of Cable : 3.5 × 10					
Kind of Plug : NONE					
Ambient Temp : 40°C = 104°F					
Other Pump Data		Weight : 78 Kg Standard Approve			
Impeller Size (mm) : *					
Pressuer Rating : PN 16					
Min. Fluid Temp : 10°C = 50°F					
Max. Fluid Temp : 40°C = 104°F					
Ambient Temp : 40°C = 104°F					
Humidity % : 100%					
Special Specification		Applicant:			
Installation status : Ver					
Variable frequency : NONE					
Solid Passage 28 mm		Dimensions (in.)			
Materials					
Pump Body : Cast Iron					
Support: Cast Iron					
Impeller Cast Iron					
Mechanical Seal: Silicon Carbide					
Rubber Steel					
Pump Shaft: SUS 304					
Strainer Cast Iron					
outer cover: Cast Iron					
Motor: Cast Iron					
Shaft Seal		UL			
Type: *					
Stationary Part SUS 304					
Rotating Part SUS 304					
Elastomer Cast Iron					
Pump and Motor specification optional		CE			
With Booster System None					
With Complack None					
Special Material None					
Specail Voltage None					
Protection system required		Shops Markets and Super Markets			
External Flout switch NONE					
Minimum Starter Starter SWT					