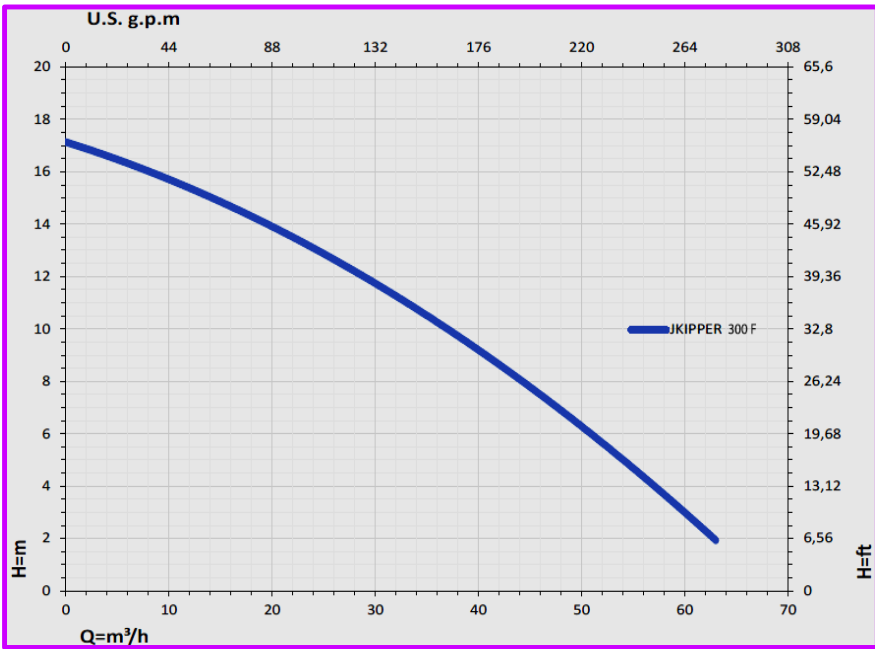
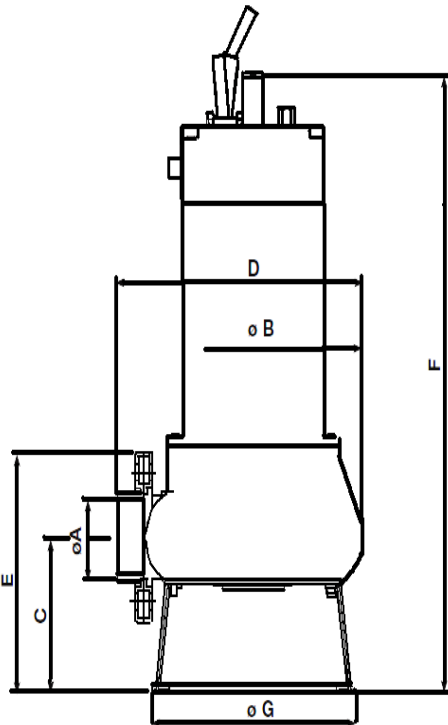


Gol Pumps Thechnology		DATA SHEET		Gol Pumps Technology INC www.golpumps.com www.golpumps.us Email : info@golpumps.com	
Dewatering Pump JMS					
Pump Data		U.S. g.p.m 			
Brand :	JMS				
Model :	JKIPPER 300 F				
Head Rate: 45 FEET	Flow Rate: 88 GPM				
Head Max: 56 FEET	Flow Max: 284 GPM				
Head Min: 6 FEET	Flow Min: 5 GPM				
RPM :	3450 rpm				
Normal Power P1 :	8.5 HP				
Fluid:	Water				
Fluid Temperature:	at about 25 °C.				
Density:	water 1.0 kg/Dm³				
Fluid Viscosity:	8.90 × 10 ⁻⁴ Pa·s				
With Float switch	NONE				
Kind of Workiny:	Submersible				
Delivery size	3" NPT				
Suction size	With Strainer				
Made in :	ITALY				
Motor Data					
Power P2:		 			
Power P1:	6.5 KW				
Phase (PH):	3				
Rate Voltage :	230 V				
Capacitor Need :	* μF				
Ferequency :	60 Hz				
Rated Speed (rpm):	3450 rpm				
Max. I (A):	21 A				
Cos φ :	0.85				
Degree of Protection (IP):	IP 68				
Safety Protection Included:	F				
length of Cable :	10 M				
Kind of Plug :	NONE				
Ambient Temp :	40°C = 104°F				
Other Pump Data					
Impeller Size (mm) :	*				
Pressuer Rating :	PN 16				
Min. Fluid Temp :	10°C = 50°F				
Max. Fluid Temp :	35°C = 95°F				
Ambient Temp :	40°C = 104°F				
Humidity % :	100%				
Special Specification					
Installation status :	Vertical				
Variable frequency :	NONE				
Solid Passage	80 mm				
Materials					
Pump Body :	Stainless steel				
Support:	Stainless steel				
Impeller	Stainless steel				
Mechanical Seal:	Silicon Carbide				
Rubber	NBR				
Pump Shaft:	Stainless steel				
Strainer	Stainless steel				
outer cover:	Stainless steel				
Motor Case:	Stainless steel				
Shaft Seal		Weight : 25.5 Kg Standard Approve		Applicant:	
Type:	*	CE		Decantation Pit Sewage Pit and Slurry Collection Pit Pump out Pump out of Lavatory Foul Water with Possible Floating Domestic and Industrial Lavatory Black Water Handling Systems	
Stationary Part	Silicon Carbide				
Rotating Part	Silicon Carbide				
Elastomer	NBR				
Pump and Motor specification optional				Dimention in mm A 3" B 253 C 127 D 278 E 217 F 515 G 214	
With Booster System	None				
With Complack	None				
Special Material	None				
Specail Voltage	None				
Protection system required					
External Flout switch	NONE				
Minimum Starter	Starter SWT				