



Technical Data

Submersible Motor - 4CS2516M

Revision no.

Page:

1

Receiver


From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address



Brand: Gol Pumps
Model: 4CS2516M
Material: Stainless Steel 304

Dimensions (mm):

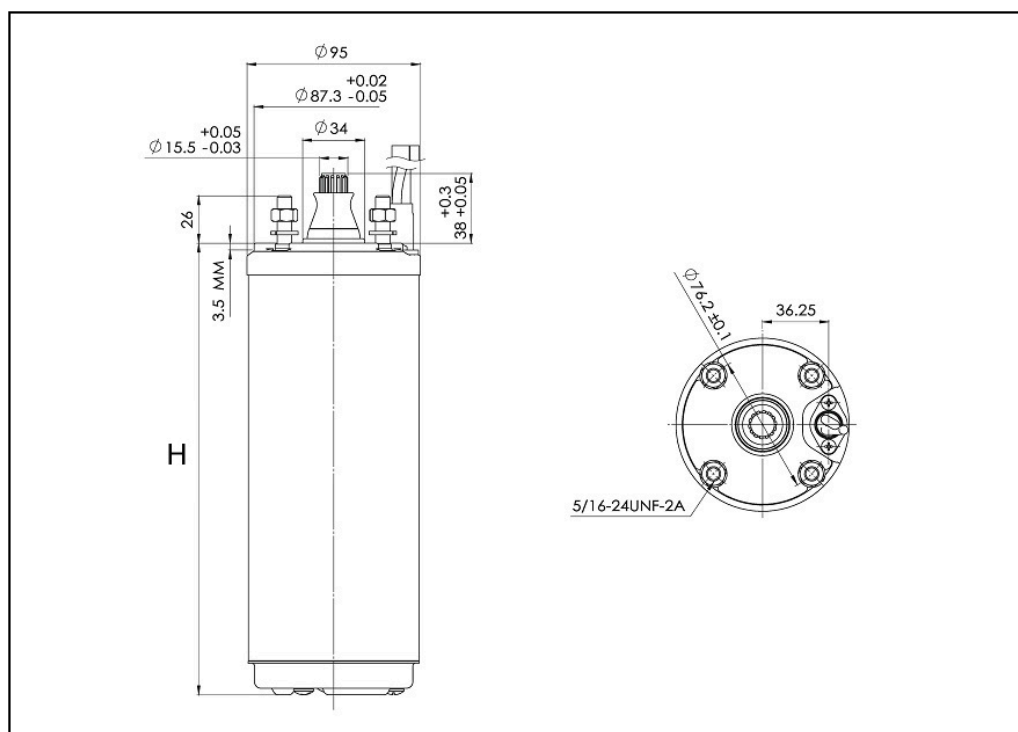

H	Cable		Weight
in.	Length (ft.)	AWG	lb.
13.2"	3.9	14	23

Project

Project ID

Created by

Created on

Last update



Part List and Materials

Submersible Motor - 4CS2516M

Revision no.

Page:


3

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

Motor Model	P2		S.F	Voltage	Phase	Wire	In	I _{max}	I _{start}	PF (%)		Efficiency (%)		RPM	Thrust	Capacitor
				V	PH		A	A	A	Allowable Load	Overload Factor	Allowable Load	Overload Factor		N	UF
	kW	HP		V	PH		A	A	A	Allowable Load	Overload Factor	Allowable Load	Overload Factor		N	UF
4CS2516M	0.55	0.75	1.5	230	Single	2	6.6	6.7	23	0.75	0.83	49	60.3	3450	2000	20UF 450V

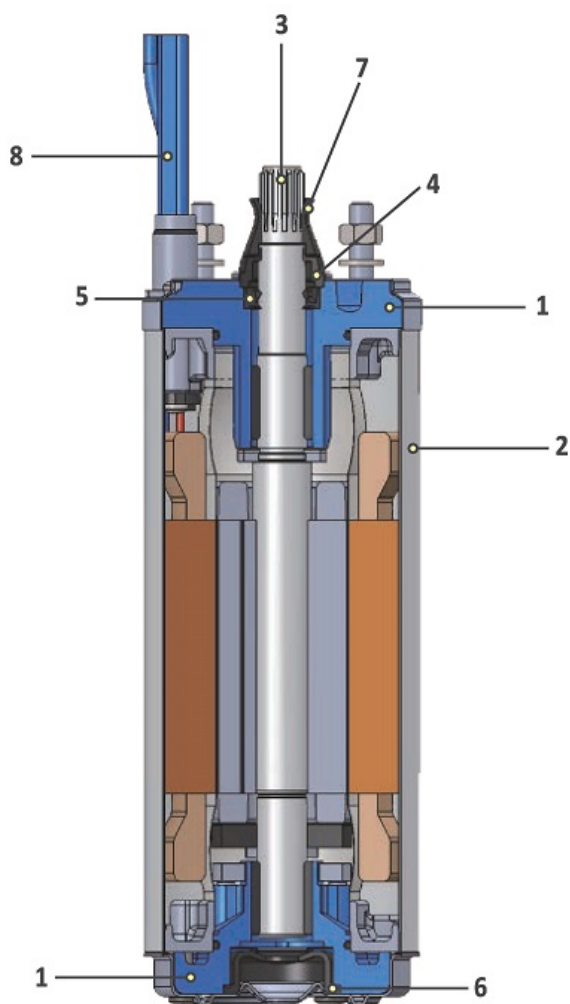

NO.	Component	4CS
1	Upper/Lower Bracket	AISI 304
2	Stator Shell	AISI 304
3	Shaft	AISI 420
4	Seal Cover	Nylon
5	Lip Seal	NBR
6	Diaphragm	NBR
7	Sand Slinger	NBR
8	Lead Wire (Cable)	XLPE
	Bolts and Screws	AISI 304
	Lead Potting	Epoxy
	Thrust Pad	AISI 420

Project

Project ID

Created by

Created on

Last update