



Technical Data

Submersible Motor - 4CS3536M

Revision no.

Page:

1

Receiver


From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address



Brand: Gol Pumps
Model: 4CS3536M
Material: Stainless Steel 304

Dimensions (mm):

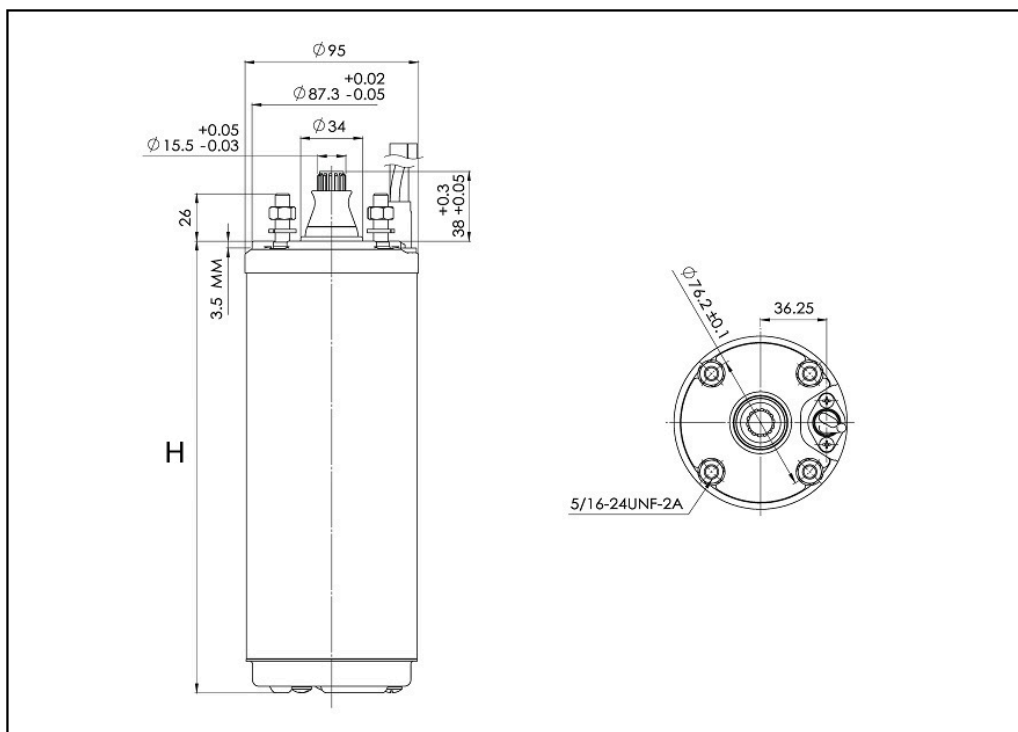

H	Cable		Weight
in.	Length (ft.)	AWG	lb.
16.7"	3.9	14	30

Project

Project ID

Created by

Created on

Last update



Part List and Materials

Submersible Motor - 4CS3536M

Revision no.

Page:


3

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

Motor Model	P2		S.F	Voltage	Phase	Wire	In	I _{max}	I _{start}	PF (%)		Efficiency (%)		RPM	Thrust	Capacitor
				V	PH		A	A	A	Allowable Load	Overload Factor	Allowable Load	Overload Factor		N	UF
	kW	HP		V	PH		A	A	A	Allowable Load	Overload Factor	Allowable Load	Overload Factor		N	UF
4CS3536M	1.1	1.5	1.3	230	Single	2	7.7	9.4	31.8	0.95	0.96	64.3	64.8	3450	3000	30UF 450V

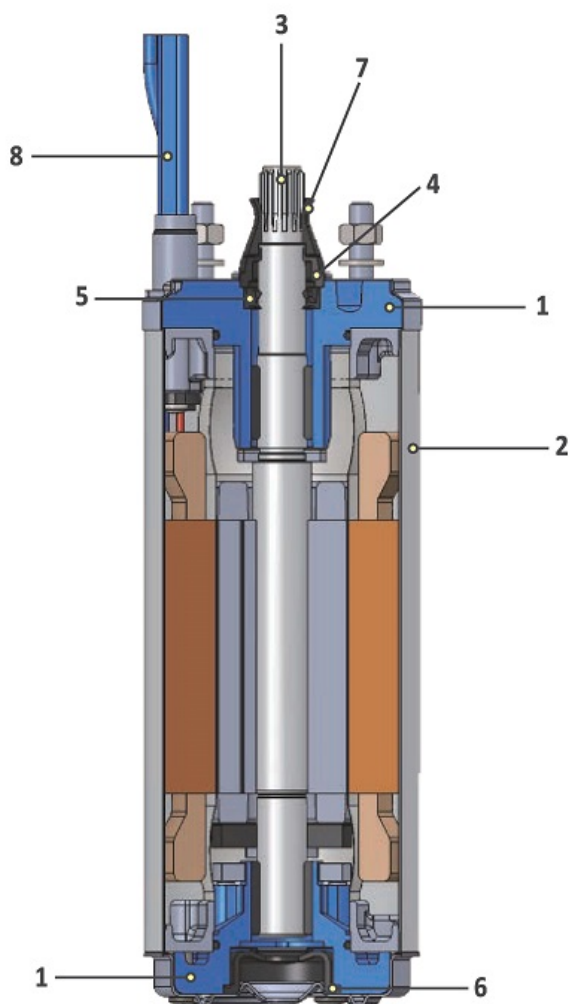

NO.	Component	4CS
1	Upper/Lower Bracket	AISI 304
2	Stator Shell	AISI 304
3	Shaft	AISI 420
4	Seal Cover	Nylon
5	Lip Seal	NBR
6	Diaphragm	NBR
7	Sand Slinger	NBR
8	Lead Wire (Cable)	XLPE
	Bolts and Screws	AISI 304
	Lead Potting	Epoxy
	Thrust Pad	AISI 420

Project

Project ID

Created by

Created on

Last update