



Technical Data **Submersible Motor - 6CS7126D**

Revision no.

Page:

1

Receiver


From

Company name
 Respons. Department
 Person in charge
 Phone number
 Fax no
 E-mail address



Brand: Gol Pumps
Model: 6CS7126D
Material: Stainless Steel 304

Dimensions (mm):

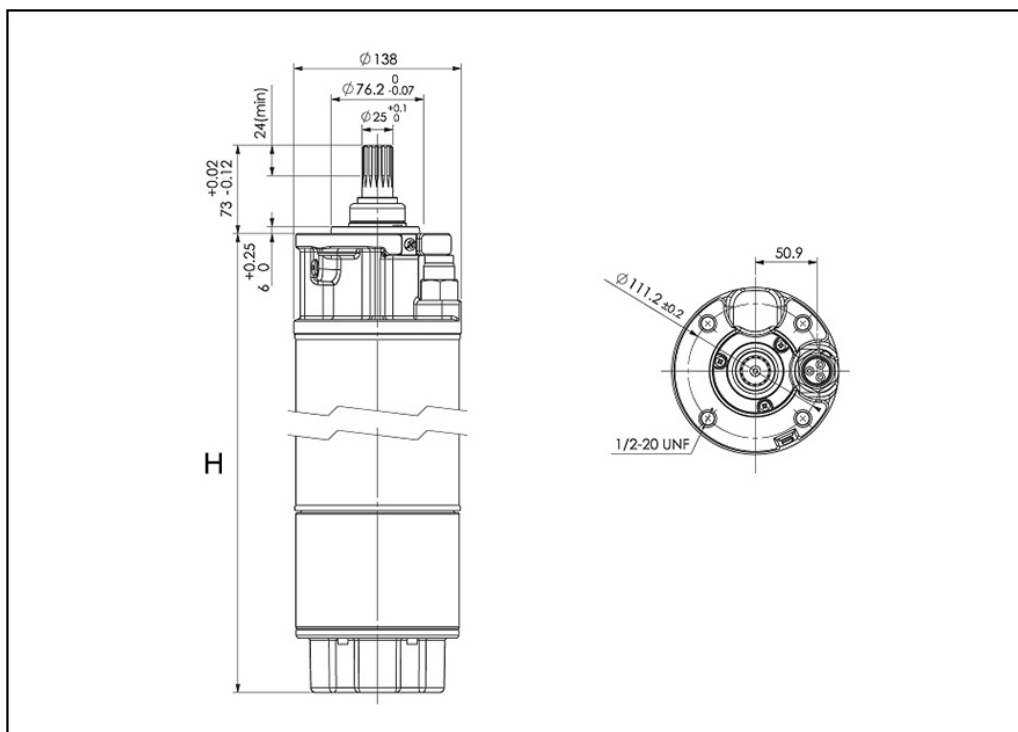

H	Cable		Weight
in.	Length (ft.)	AWG	lb.
25.7"	13	10	105

Project

Project ID

Created by

Created on

Last update



Part List and Materials

Submersible Motor - 6CS7126D

Revision no.

Page:


3

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

Motor Model	P2		S.F	Voltage	Phase	In	I _{max}	I _{start}	PF (%)		Efficiency (%)		RPM	Thrust
	kW	HP		V	PH	A	A	A	Allowable Load	Overload Factor	Allowable Load	Overload Factor		N
6CS7126D	7.5	10	1.15	230	Three	27.9	31.4	112	0.85	0.87	78.9	78.4	3450	15500

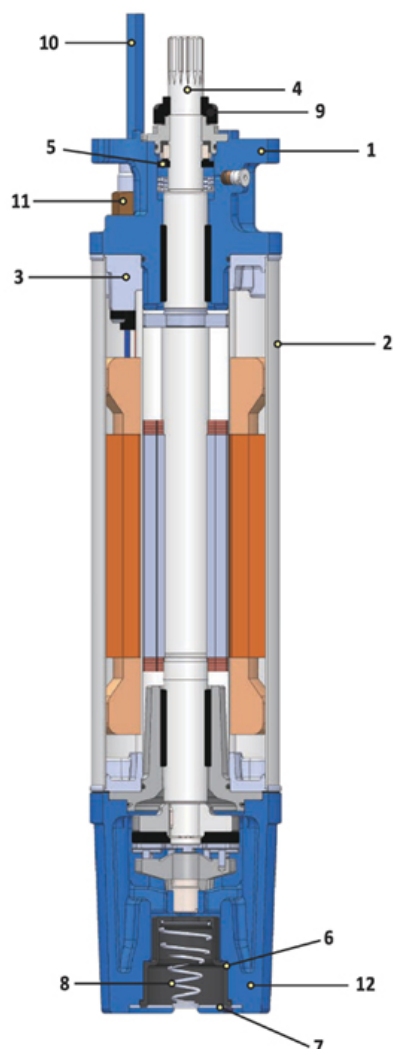

NO.	Component	6CS
1	Upper Bracket	AISI 304
2	Stator Shell	AISI 304
3	Stator Ends	AISI 304
4	Shaft	AISI 420
5	Mechanical Seal	Carbon / ceramic
6	Diaphragm	NBR
7	End Cover	AISI 304
8	Spring	AISI 304
9	Sand Slinger	NBR
10	Lead Wire (Cable)	XLPE
11	Cable Jam Nut	AISI 304
12	Lower Bracket	AISI 304 over Iron
	Lead Potting	Epoxy
	Mechanical Seal / Rubber Components	NBR
	Thrust Pad	AISI 420

Project

Project ID

Created by

Created on

Last update