



Technical Data

Submersible Pump - ST 35-6

Revision no.

Page:

1

Receiver


From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address



Brand: Gol Pumps
Model: ST 35-6
Material: Noryl

Dimensions:

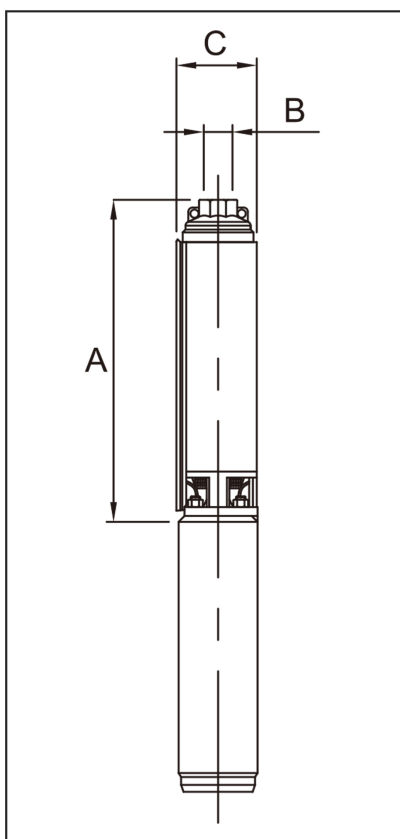

Outlet	Dimensions (inch)			Weight lb.
	A	B	C	
NPT 2"	14.1"	2"	3.9"	7.5

Project

Project ID

Created by

Created on

Last update



Performance Curves

Submersible Pump - SP 35-6

Revision no.

Page:


2

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

Pump Model	Motor		Q Capacity 3500RPM										
			Gal/Min	0	15.9	18.5	21.2	23.8	26.4	31.7	37	42.3	47.6
	kW	HP	Head in Feet	170.6	144.4	141.2	137.8	131.2	124.7	108.3	88.6	59.1	29.5
ST 35-6	0.75	1											

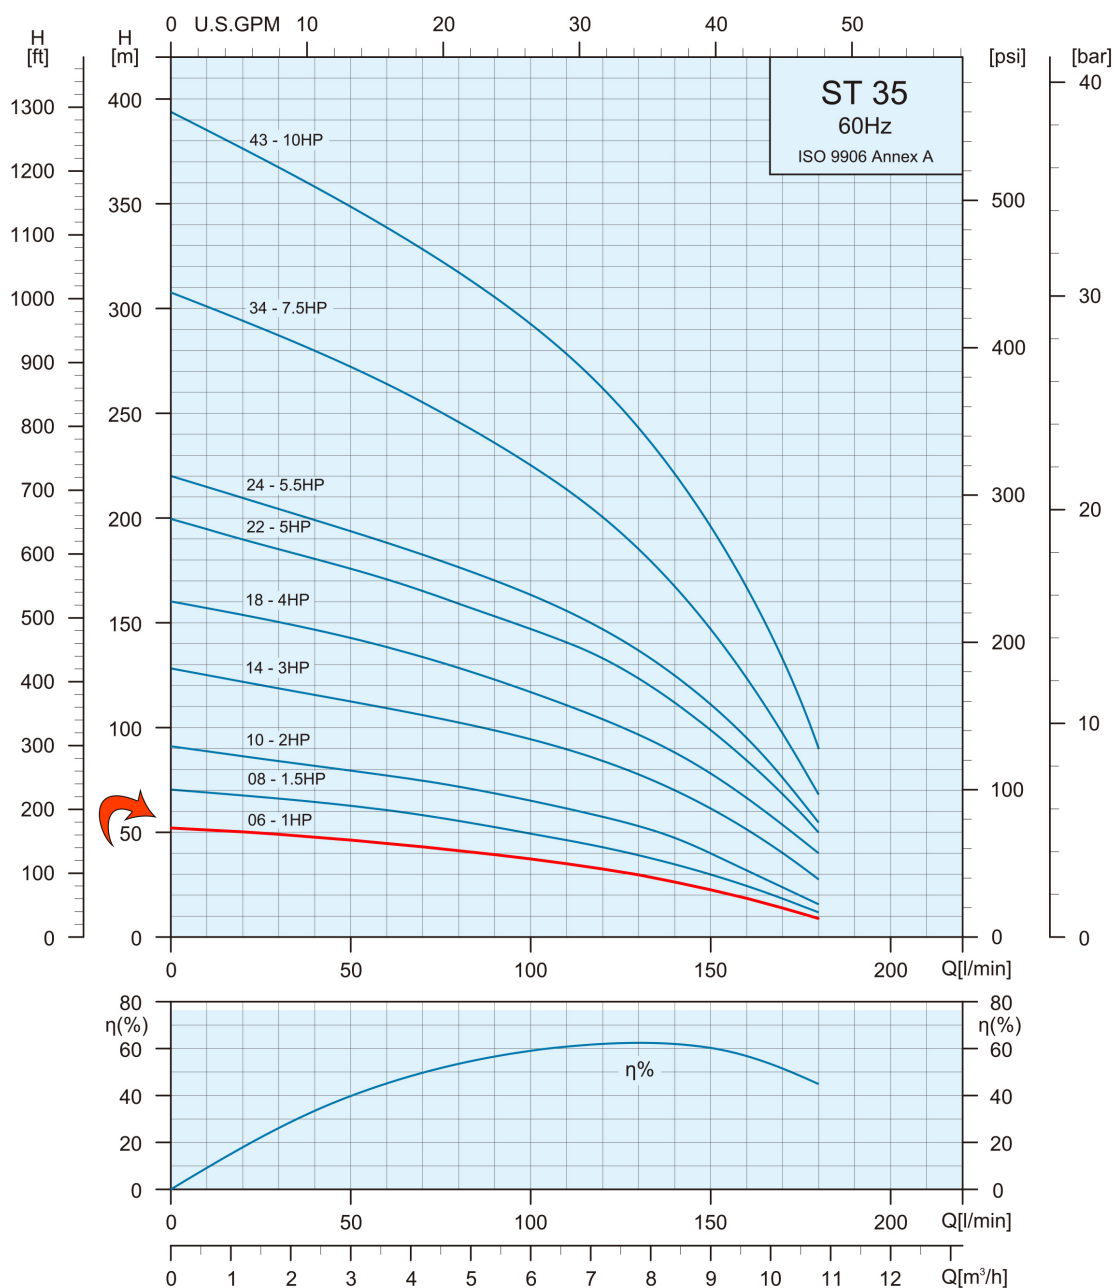

Project

Project ID

Created by

Created on

Last update



Part List and Materials

Submersible Pump - SP 35-6

Revision no.


Page:

3

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

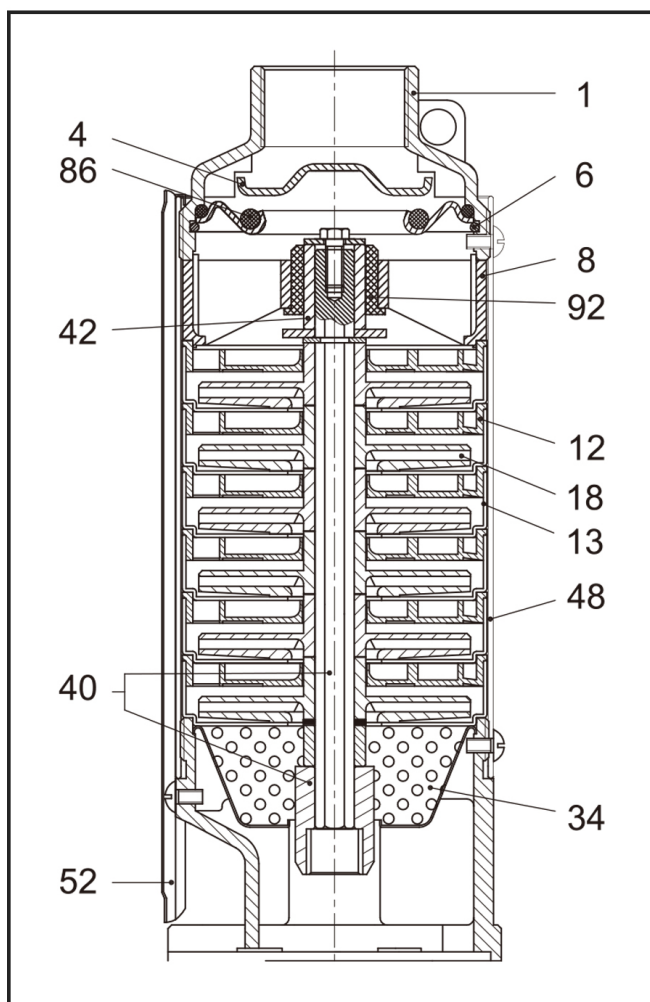

No.	Part Name	Materials
1	Discharge Head	AISI 304
4	Check Valve Cone	AISI 304
6	Check Valve Retaining Ring	AISI 304
8	Bearing Spider	Glass Filled Polycarbonate
12	Diffuser	Glass Filled Polycarbonate
13	Bowl	AISI 304
18	Impeller	Noryl
34	Strainer	AISI 304
40	Pump Shaft / Coupling	AISI 304
42	Shaft Sleeve	AISI 304 or Norly
48	Pump Casing	AISI 304
52	Cable Guard	AISI 304
86	O-Ring	NBR
92	Bearing	Polyacetal

Project

Project ID

Created by

Created on

Last update