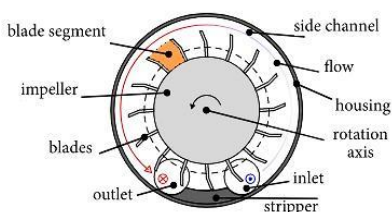










Gol Pumps Thechnology		DATA SHEET		Gol Pumps Technology INC																																	
		VORTEX GAS PUMP		www.golpumps.com																																	
		BLOWER PUMP		www.golpumps.us																																	
				Email : info@golpumps.com																																	
Pump Data		  																																			
Brand : Gol Pump																																					
Model : GP1-410-750																																					
Pressure Max : 28 Kpa																																					
Flow Max: 132 M3/h																																					
Vacuume Max: 19 Kpa																																					
RPM : 3400 rpm																																					
Normal Power P1 : 750 W																																					
Fluid: Air-GAS																																					
Kind of Pump GAS PUMP																																					
Noise: < 60 db																																					
Suction size 50 mm																																					
delivery size 173 mm																																					
N.M.: 12.6 Kg																																					
G.W 14.1 Kg																																					
Made in : CHINA																																					
Motor Data		Dimension <table><tr><td>Items</td><td>mm</td><td>Items</td><td>mm</td></tr><tr><td>L</td><td>300</td><td>A2</td><td>265</td></tr><tr><td>W</td><td>286</td><td>L1</td><td>80</td></tr><tr><td>H</td><td>302</td><td>B</td><td>95</td></tr><tr><td>H1</td><td>165</td><td>G</td><td>173</td></tr><tr><td>H2</td><td>58</td><td>D</td><td>50</td></tr><tr><td>A</td><td>111</td><td>S</td><td>12</td></tr><tr><td>A1</td><td>225</td><td>C</td><td>G 1 1/2</td></tr></table>  				Items	mm	Items	mm	L	300	A2	265	W	286	L1	80	H	302	B	95	H1	165	G	173	H2	58	D	50	A	111	S	12	A1	225	C	G 1 1/2
Items	mm					Items	mm																														
L	300					A2	265																														
W	286					L1	80																														
H	302					B	95																														
H1	165					G	173																														
H2	58					D	50																														
A	111					S	12																														
A1	225					C	G 1 1/2																														
KIND OF Motor Normal Motor																																					
Power P1: 0.9 KW																																					
Phase (PH): Single phase																																					
Rate Voltage : 110 V																																					
Capacitor Need : Included																																					
Ferequency : AC																																					
Rated Speed (rpm): 3400 rpm																																					
Current (A): 7.5 A																																					
Cos φ : 0.95																																					
Degree of Protection (IP): IP 55																																					
Safety Protection Included : E																																					
length of Cable : None																																					
Kind of Plug : None																																					
Ambient Temp : 40°C = 104°F																																					
Other Pump Data		Applicant : Aquaculture (Fish and Prawn Pond aeration) , Waste Water Treatment , Sewage Treatment , Sewage Treatment System , Pneumatic Conveying Systems Lifting and Holding of Parts by Vacuum Packing Machines Filling of Bags / Bottles / Hoppers Soil Remediation , Food Processing , Laser Printers Dental Suction Equipment Paper Processing , Gas Analysis , Vacuum Application																																			
Impeller Model : Radial Blader																																					
Pressuer Rating : 28 Kpa																																					
Min. Fluid Temp : 0°C = 32° F																																					
Max. Fluid Temp : 40°C = 104°F																																					
Ambient Temp : 40°C = 104°F																																					
Humidity % : normal																																					
Special Specification																																					
Installation status : Horizontal																																					
Variable frequency : possible																																					
Solid Passage: None																																					
Materials		other Applicants    Uses in the printing house For drying in car washes    Oxygenation of pool water convenient to is it press product of taking shape after to take out. powder body grains of body ,etc. air of raw materials transport																																			
Pump Body : Aluminum Alloy																																					
Diffuser : Aluminum Alloy																																					
Impeller: Aluminum Alloy																																					
Mechanical Seal: Rubber Lip Seal																																					
Rubber: NBR																																					
Pump Shaft: CK 45 Alloy																																					
Suction inlet : Aluminum Alloy																																					
Deliver Outlet: Aluminum Alloy																																					
Motor: Aluminum Alloy																																					
Standard Approve :		CE CE																																			
CE																																					