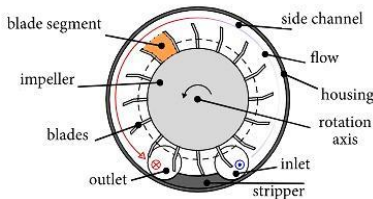










Gol Pumps Thechnology		DATA SHEET		Gol Pumps Technology INC www.golpumps.com www.golpumps.us Email : info@golpumps.com																																	
		VORTEX GAS PUMP																																			
		BLOWER PUMP																																			
Pump Data				  																																	
Brand : Gol Pump																																					
Model : GP1-510-1100																																					
Pressure Max : 30 Kpa																																					
Flow Max: 245 M3/h																																					
Vacuume Max: 24 Kpa																																					
RPM : 3400 rpm																																					
Normal Power P1 : 1100 W																																					
Fluid: Air-GAS																																					
Kind of Pump GAS PUMP																																					
Noise: < 60 db																																					
Suction size 60 mm																																					
delivery size 200 mm																																					
N.M.: 23 Kg																																					
G.W 24.7 Kg																																					
Made in : CHINA																																					
Motor Data				Dimension <table><tr><th>Items</th><th>mm</th><th>Items</th><th>mm</th></tr><tr><td>L</td><td>325</td><td>A2</td><td>300</td></tr><tr><td>W</td><td>335</td><td>L1</td><td>30</td></tr><tr><td>H</td><td>340</td><td>B</td><td>140</td></tr><tr><td>H1</td><td>190</td><td>G</td><td>200</td></tr><tr><td>H2</td><td>61.5</td><td>D</td><td>60</td></tr><tr><td>A</td><td>115</td><td>S</td><td>14</td></tr><tr><td>A1</td><td>270</td><td>C</td><td>G 2</td></tr></table>  		Items	mm	Items	mm	L	325	A2	300	W	335	L1	30	H	340	B	140	H1	190	G	200	H2	61.5	D	60	A	115	S	14	A1	270	C	G 2
Items	mm	Items	mm																																		
L	325	A2	300																																		
W	335	L1	30																																		
H	340	B	140																																		
H1	190	G	200																																		
H2	61.5	D	60																																		
A	115	S	14																																		
A1	270	C	G 2																																		
KIND OF Motor Normal Motor																																					
Power P1: 1.3 KW																																					
Phase (PH): Single phase																																					
Rate Voltage : 220 V																																					
Capacitor Need : Included																																					
Ferequency : AC																																					
Rated Speed (rpm): 3400 rpm																																					
Current (A): 10.5 A																																					
Cos φ : 0.95																																					
Degree of Protection (IP): IP 55																																					
Safety Protection Included : E																																					
length of Cable : None																																					
Kind of Plug : None																																					
Ambient Temp : 40°C = 104°F																																					
Other Pump Data				Applicant : Aquaculture (Fish and Prawn Pond aeration) , Waste Water Treatment , Sewage Treatment , Sewage Treatment System , Pneumatic Conveying Systems Lifting and Holding of Parts by Vacuum Packing Machines Filling of Bags / Bottles / Hoppers Soil Remediation , Food Processing , Laser Printers Dental Suction Equipment Paper Processing , Gas Analysis , Vacuum Application																																	
Impeller Model : Radial Blader																																					
Pressuer Rating : 30 Kpa																																					
Min. Fluid Temp : 0°C = 32° F																																					
Max. Fluid Temp : 40°C = 104°F																																					
Ambient Temp : 40°C = 104°F																																					
Humidity % : normal																																					
Special Specification						other Applicants   																															
Installation status : Horizontal																																					
Variable frequency : possible																																					
Solid Passage: None		Gr/M3																																			
Materials				Standard Approve : CE 																																	
Pump Body : Aluminum Alloy																																					
Diffuser : Aluminum Alloy																																					
Impeller: Aluminum Alloy																																					
Mechanical Seal: Rubber Lip Seal																																					
Rubber: NBR																																					
Pump Shaft: CK 45 Alloy																																					
Suction inlet : Aluminum Alloy																																					
Deliver Outlet: Aluminum Alloy																																					
Motor: Aluminum Alloy																																					
Standard Approve :				  																																	
CE																																					
				Oxygenation of pool water																																	
				convenient to is it press product of taking shape after to take out.																																	
				powder body grains of body ,etc. air of raw materials transport																																	