




# Switchmatic 3

Electronic pressure switch with dry contact output for control panels.

SWITCHMATIC 3 is an electronic pressure switch with integrated digital pressure gauge. Cut-in and cut-out pressure implementation can be set easily and accurately. Wiring is carried out identically to a conventional electromechanical switch.

Its dry contact output it's ideal for transmitting an open/close signal to an external control panel. Version **in-out** also includes a volt free contact for monitoring the alarms displayed in the screen.



**SWITCHMATIC 3**  
**SWITCHMATIC 3/in-out**

## OPERATING CHARACTERISTICS


- Dry contact output for control panels.
- ART function (Automatic Reset Test). If the device has been stopped due the action of the safety system against dry operation, the ART tries to connect the pump, with a programmed periodicity because the water supply could have been restored.
- Sleep mode with low power consumption.
- Inner pressure transmitter.
- Integrated pressure gauge with bar and psi instantaneous display.
- User friendly control panel with 3-digits display, led-lights and pushbuttons.
- Manual start.
- Two operation modes:
  - Differential.
  - Inversed differential.
- **SWITCHMATIC 3/in-out** also includes:
  - Volt-free contact for monitoring the alarms displayed in screen originated by irregularities or problems of the system.
  - Float switch connection, for minimum level detection in the suction tank, its use is optional. This system is independent of the dry-running safety system.



Low Voltage Directive 2014/35/EC  
Electromagnetic Compatibility 2014/30/EC  
RoHS 2011/65/EC + 2015/863/EC



## CONTROL PANEL





- 3 digits display:
  - Operating mode: Instantaneous pressure.
  - Set mode: Cut in and cut out pressure.
- Bar-psi led lights (green):
  - Operating mode: Bright bar or psi.
  - Pump on: Flashing bar or psi.
- Star-Stop Led (green):
  - Bright: displayed Pressure start or Pressure stop.
  - Flashing: Setting Psart or Pstop.
- Push Buttons ▲▼: Increase or decrease configuration parameters.
- ENTER push-button:
  - Manual start and stop.
  - Confirm configuration value.
- Alarm red light 🔔: dry-run, fast cycling, pressure sensor.

## TECHNICAL CHARACTERISTICS

	SWITCHMATIC 3
Power supply voltage	~1x48-230 Vac/Vdc
Frequency	50/60 Hz
Max. current	16 A
Output	dry-contact
Starting pressure range (cut-in)	0,5 ÷ 11,5 bar
Stop pressure range (cut-out)	1 ÷ 12 bar
Maximum differential	11,5 bar
Minimum differential	0,3 bar
Factory setting (cut-in/cut-out)	3 / 4 bar
Protection degree	IP55
Max. water temperature	40 °C
Max. environment temperature	50 °C
Net weight (without cables)	0,4 kg
Inlet thread	G 1/4" F

## DIMENSIONS

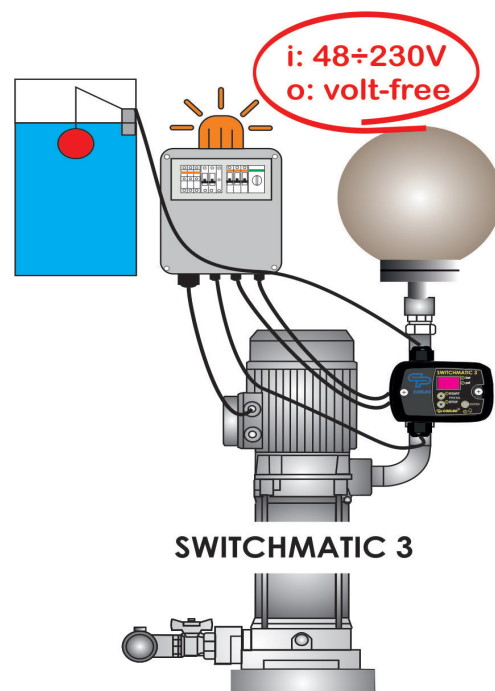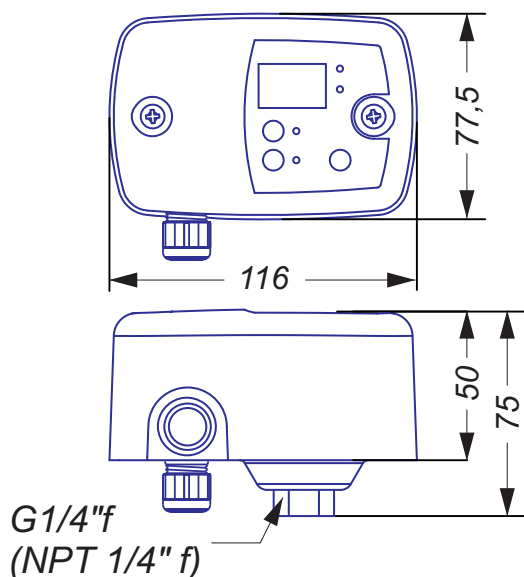



**Gol Pumps Technology Company**  
*Supply, Import, Export Water Pumps*

---

**Gol Pumps Technology**

[www.golpumps.com](http://www.golpumps.com)

**Our Address:** 6520 NW 77th CT, Miami FL 33166, USA

**Sales DPT:** +1 786 615 8984

**After Sales Service:** +1 786 452 9775

**Fax:** +1 786 615 7043

**Email:** [info@golpumps.com](mailto:info@golpumps.com)

