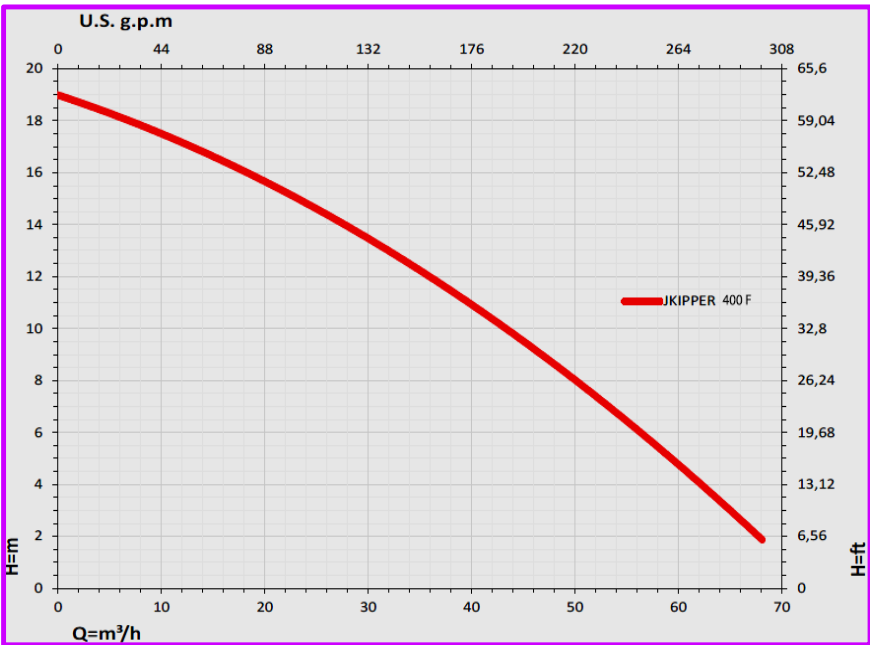


Gol Pumps Thechnology	DATA SHEET		Gol Pumps Technology INC www.golpumps.com www.golpumps.us Email : info@golpumps.com	
	Dewatering Pump JMS			
Pump Data				
Brand : JMS				
Model : JKIPPER 400 F				
Head Rate: 52 FEET	Flow Rate: 88 GPM			
Head Max: 63 FEET	Flow Max: 302 GPM			
Head Min: 6 FEET	Flow Min: 5 GPM			
RPM : 3450 rpm				
Normal Power P1 : 7.5 HP				
Fluid: Water				
Fluid Temperature: at about 25 °C.				
Density: water 1.0 kg/Dm³				
Fluid Viscosity: 8.90 × 10-4 Pa-s				
With Float switch: NONE				
Kind of Workiny: Submersible				
Delivery size: 3" NPT				
Suction size: With Strainer				
Made in : ITALY				
Motor Data				
Power P2:				
Power P1:	5.7 KW			
Phase (PH):	3			
Rate Voltage :	230 V			
Capacitor Need :	*	µF		
Ferequency :	60 Hz			
Rated Speed (rpm):	3450 rpm			
Max. I (A):	21 A			
Cos φ :	0.85			
Degree of Protection (IP):	IP 68			
Safety Protection Included:	F			
length of Cable :	10 M			
Kind of Plug :	NONE			
Ambient Temp :	40°C = 104°F			
Other Pump Data				
Impeller Size (mm) :		*		
Pressuer Rating :	PN 16			
Min. Fluid Temp :	10°C = 50°F			
Max. Fluid Temp :	35°C = 95°F			
Ambient Temp :	40°C = 104°F			
Humidity % :	100%			
Special Specification				
Installation status :		Vertical		
Variable frequency :		NONE		
Solid Passage		80 mm		
Materials				
Pump Body :		Stainless steel		
Support:		Stainless steel		
Impeller		Stainless steel		
Mechanical Seal:		Silicon Carbide		
Rubber		NBR		
Pump Shaft:		Stainless steel		
Strainer		Stainless steel		
outer cover:		Stainless steel		
Motor Case:		Stainless steel		
Shaft Seal			Weight : 38.5 Kg	
Type: *			Standard Approve	
Stationary Part: Silicon Carbide			CE	
Rotating Part: Silicon Carbide			CE	
Elastomer: NBR				
Pump and Motor specification optional				
With Booster System: None				
With Complack: None				
Special Material: None				
Specail Voltage: None				
Protection system required				
External Flout switch: NONE				
Minimum Starter: Starter SWT				
			Applicant:	
			Decantation Pit Sewage Pit and Slurry	
			Collection Pit Pump out Pump out of Lavatory	
			Foul Water with Possible Floating	
			Domestic and Industrial Lavatory	
			Black Water Handling Systems	
			Dimention in mm	
			A 3"	
			B 253	
			C 127	
			D 278	
			E 217	
			F 641	
			G 214	