



Technical Data **Submersible Motor - 6CN7306D**

Revision no.

Page:
1

Receiver


From

Company name
 Respons. Department
 Person in charge
 Phone number
 Fax no
 E-mail address



Brand: Gol Pumps
Model: 6CN7306D
Material: Stainless Steel 316

Dimensions (mm):

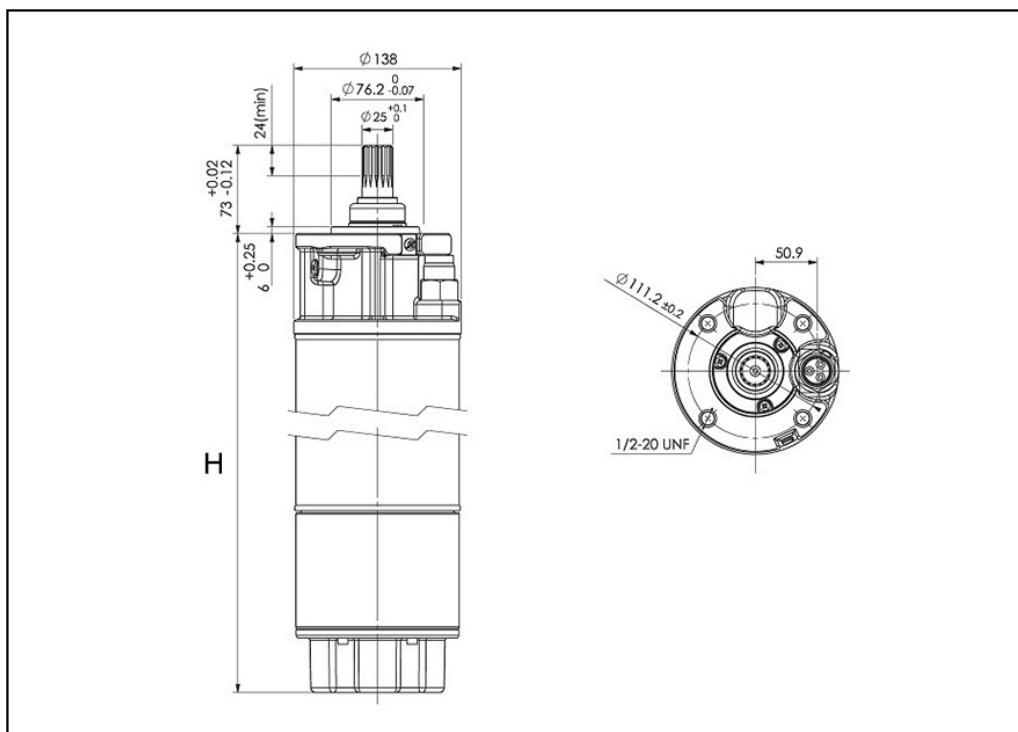

H	Cable		Weight
in.	Length (ft.)	AWG	lb.
22.6"	13	10	90

Project

Project ID

Created by

Created on

Last update



Part List and Materials

Submersible Motor - 6CN7306D

Revision no.

Page:


3

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

Motor Model	P2		S.F	Voltage	Phase	In	Imax	Istart	PF (%)		Efficiency (%)		RPM	Thrust
	kW	HP		V	PH	A	A	A	Allowable Load	Overload Factor	Allowable Load	Overload Factor		N
6CN7306D	3.7	5	1.15	460	Three	7.9	8.8	37.1	0.77	0.80	75.8	75.9	3450	15500

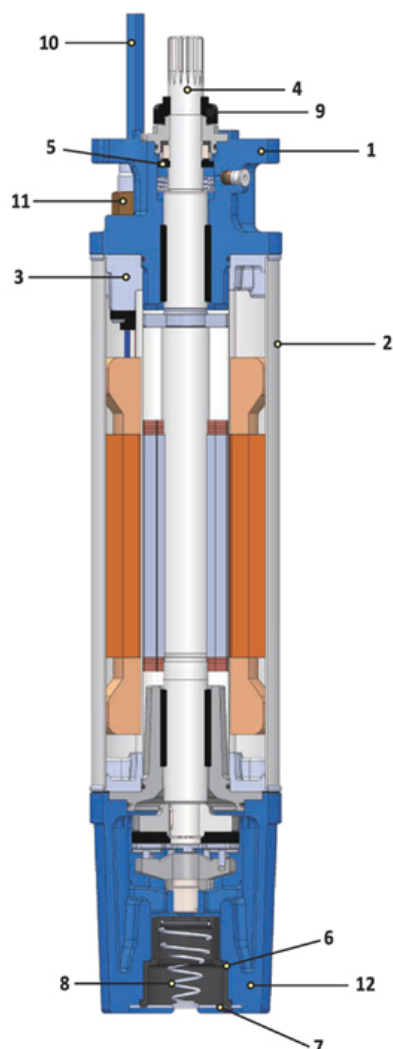

NO.	Component	6CN
1	Upper Bracket	AISI 316
2	Stator Shell	AISI 316
3	Stator Ends	AISI 316
4	Shaft	AISI 630
5	Mechanical Seal	SiC / SiC
6	Diaphragm	NBR
7	End Cover	AISI 316
8	Spring	AISI 316
9	Sand Slinger	NBR
10	Lead Wire (Cable)	XLPE
11	Cable Jam Nut	AISI 316
12	Lower Bracket	AISI 316 over Iron
	Lead Potting	Epoxy
	Mechanical Seal / Rubber Components	NBR
	Thrust Pad	AISI 420

Project

Project ID

Created by

Created on

Last update