



Technical Data **Submersible Pump - ST 40-6**

Revision no.

Page:

1

Receiver


From

Company name
 Respons. Department
 Person in charge
 Phone number
 Fax no
 E-mail address



Brand: Gol Pumps
Model: ST 40-6
Material: Noryl

Dimensions:

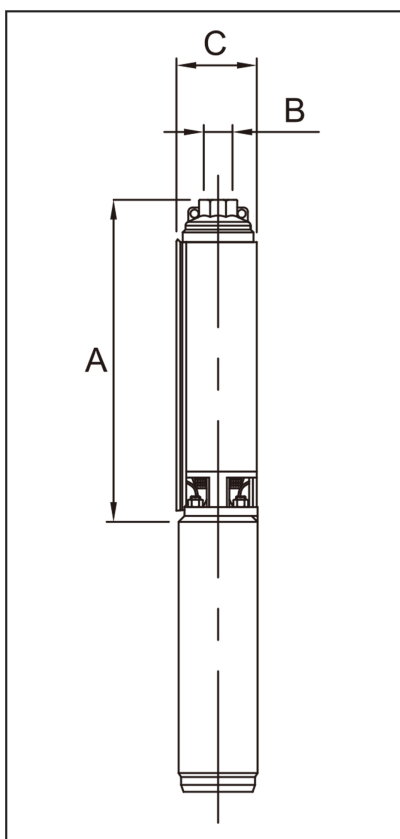

Outlet	Dimensions (inch)			Weight lb.
	A	B	C	
NPT 2"	14"	2"	3.9"	7.5

Project

Project ID

Created by

Created on

Last update



Performance Curves

Submersible Pump - SP 40-6

Revision no.

Page:


2

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

Pump Model	Motor		Q Capacity 3500RPM											
			Gal/Min	0	18.5	21.1	23.8	26.4	31.7	37	42.3	47.6	52.8	66
	kW	HP	Head in Feet	180	161	157	154	151	148	138	125	115	98	56
ST 40-6	1.5	2												

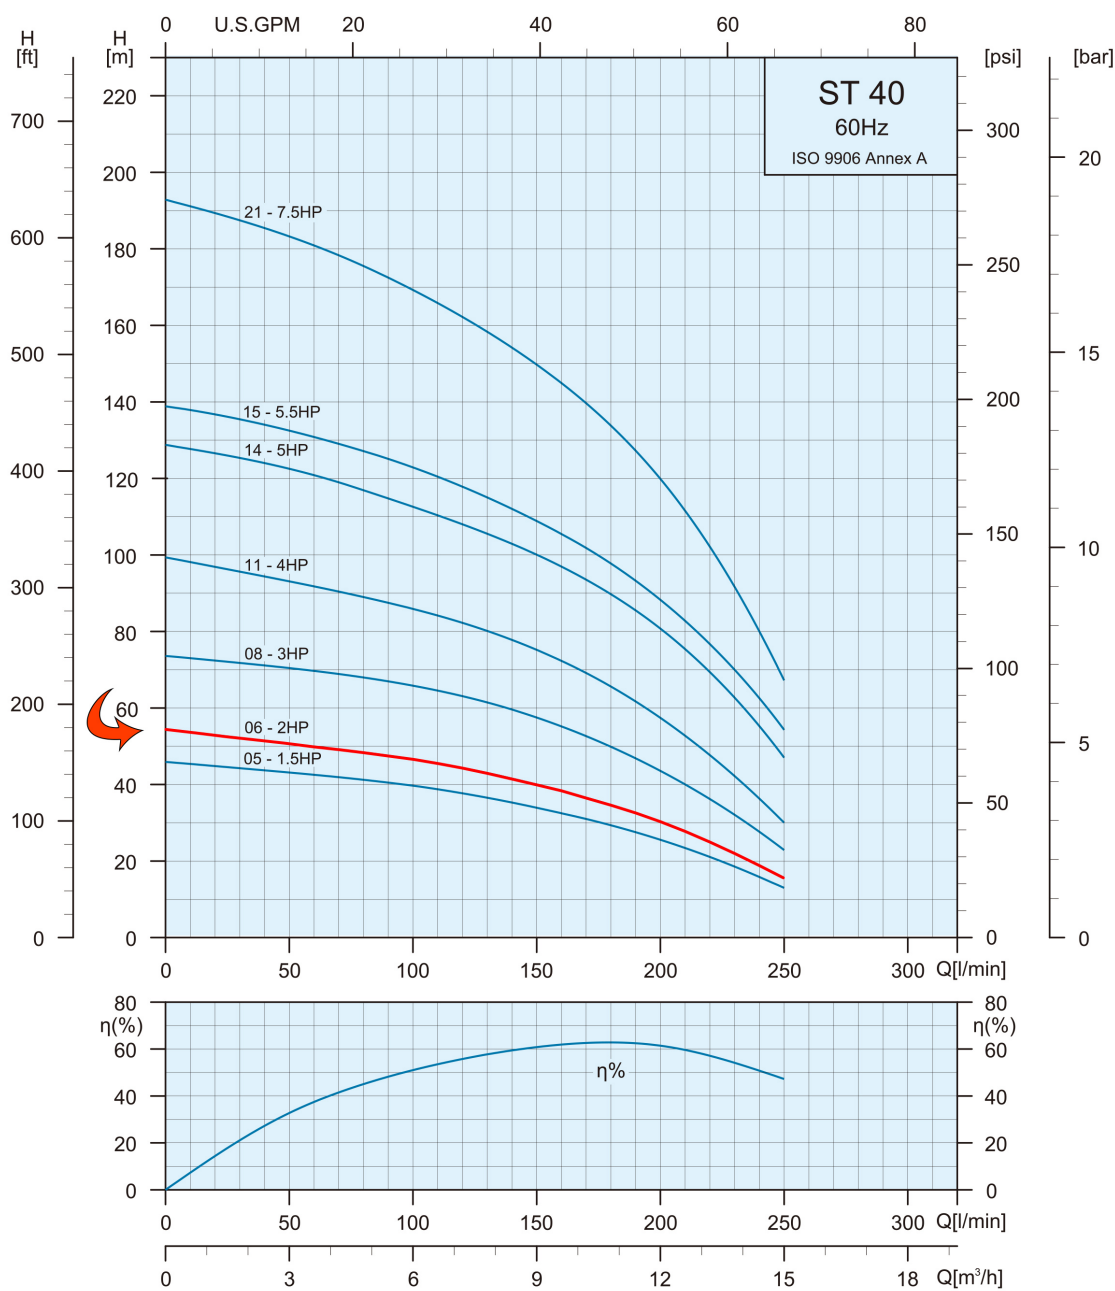

Project

Project ID

Created by

Created on

Last update



Part List and Materials

Submersible Pump - SP 40-6

Revision no.


Page:

3

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

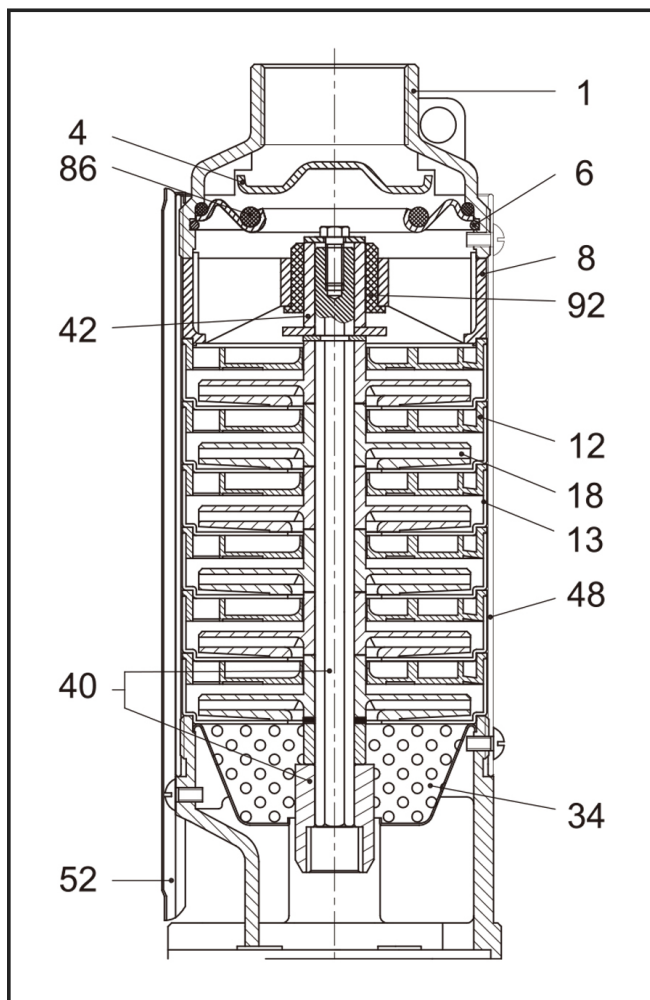

No.	Part Name	Materials
1	Discharge Head	AISI 304
4	Check Valve Cone	AISI 304
6	Check Valve Retaining Ring	AISI 304
8	Bearing Spider	Glass Filled Polycarbonate
12	Diffuser	Glass Filled Polycarbonate
13	Bowl	AISI 304
18	Impeller	Noryl
34	Strainer	AISI 304
40	Pump Shaft / Coupling	AISI 304
42	Shaft Sleeve	AISI 304 or Norly
48	Pump Casing	AISI 304
52	Cable Guard	AISI 304
86	O-Ring	NBR
92	Bearing	Polyacetal

Project

Project ID

Created by

Created on

Last update